


[technical papers]

Technical papers produced to meet the specific needs of the different end-users

AROPEL C 1 S

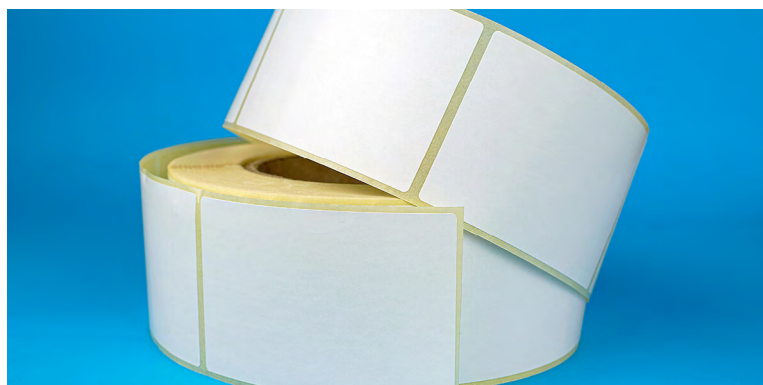

APPROVALS

1935/2004/CE
DM italian
BfR
FDA (solo versione bianca)
Directive 94/62/CE

APPLICATIONS

For adhesive labels.

DESCRIPTION

Supercalandered glassine for siliconizing, one side or both sides.
Available in white or yellow, in case of specific request unbleached and light blue too.

PARAMETERS	Unit	Method	Typical Value			
Substance	g/m ²	ISO 536	57	60	72	78
Tensile strength md	kN/m	ISO 1924-2	6,2	6,5	7,8	8,4
Tensile strength cd	kN/m	ISO 1924-2	3,3	3,5	4,1	4,4
Cobb ricinus oil (smooth.side)	g/m ²	SCAN P 37	0,6	0,6	0,6	0,6
Transparency	%	ISO 22891	53	52	49	46
Roughness PPS (smooth. side)	µm*100	ISO 8791-4	190	190	180	180
Moisture content	%	ISO 287	6	6	6	6